

# Armourbond Flash Sand

SELF-ADHERING  
BASE SHEET FLASHING

STOCK# 7920020

ROLLS PER PALLET: 30

PALLET SIZE: 132 cm x 112 cm

(52 in x 44 in)

LENGTH: 15 m (49 ft)

WIDTH: 1005 mm (39.6 in)

AREA: 14 m<sup>2</sup> (150 ft<sup>2</sup>)


THICKNESS: 2.5 mm (98 mils)

SELVAGE: 90 mm (3.5 in)

Note: All reported values are nominal.



 **IKO**® **COMMERCIAL**

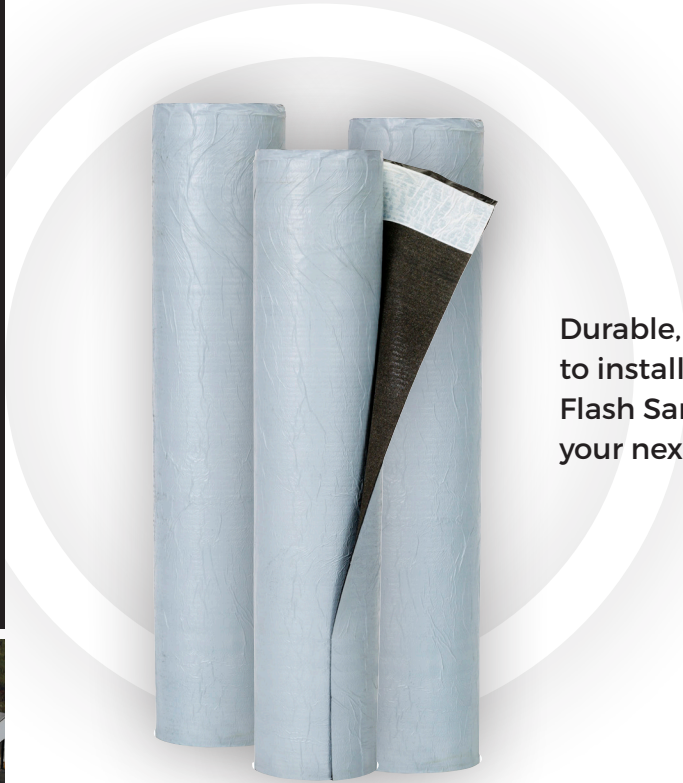

Durable, reinforced and easy to install, let Armourbond Flash Sand go to work for your next roofing project.

## Armourbond Flash Sand

SELF-ADHERING BASE SHEET FLASHING

### Tough

Armourbond Flash Sand is composed of a tough non-woven reinforced polyester mat strengthened with select glass fiber strands. It is coated top and bottom with select SBS polymers and premium asphalt to a thickness of approximately 2.5 mm (98 mils).

### Sand Coated Top, Film Release Bottom

The top surface of the product is sand coated, while the self-adhering underside is covered by a removable silicone treated release film.

### Perfect for Flashing

Armourbond Flash Sand may be placed in flame-sensitive areas for base flashing details where a mopped or cold applied cap flashing will be used.

- DURABLE
- SELF-ADHERING

# Armourbond Flash Sand

SELF-ADHERING  
BASE SHEET FLASHING



# IKO® COMMERCIAL

IKO building products are responsibly designed and produced with consideration for sustainability and the environment, incorporating quality recycled components where practical, manufactured in facilities that comply with environmental standards.

**Armourbond Flash Sand** satisfies the requirements of CGSB-37.56-M and ASTM D6164 Type 1, Grade S materials.

ISO 9001 – 2008 REGISTERED FACILITY

Please contact your *IKO Technical Representative* for specific slope requirements.



CHARACTERISTICS	UNITS	MEETS/ EXCEEDS	SPECIFICATION	TEST METHOD**	STANDARD LIMITS
Cold Flex:	°C (°F)	✓	ASTM D6164	ASTM D5147	MIN: -18 (0)
Tensile Strength MD: XD:	kN/m (lbf/in)	✓ ✓	ASTM D6164	ASTM D5147	MIN: 8.8 (50)
Ultimate Elongation MD: XD:	%	✓ ✓	ASTM D6164	ASTM D5147	MIN: 38
Tear Strength MD: XD:	N (lbf)	✓ ✓	CGSB-37.56-M	CGSB-37.56-M	MIN: 20 (4.5)*
Tensile-Tear MD: XD:	N (lbf)	✓ ✓	ASTM D6164	ASTM D5147	MIN: 246 (55)

\* CGSB-37.56-M REVISION, 9TH DRAFT, DATED JANUARY, 1997 \*\* Although both ASTM and CGSB may have requirements for a particular test, only the more stringent is indicated. The information on this product information sheet is based upon data considered to be true and accurate, based on laboratory tests and production measurements, and is offered solely for the user's consideration, investigation and verification. Nothing contained herein is representative of a warranty or guarantee for which the manufacturer can be held legally responsible. The manufacturer does not assume any responsibility for any misrepresentation or assumptions the reader may formulate.