EXPAND-O-FLASH® EXPANSION JOINT COVER

PVC EJ/WC Heat Welded

Features and Components

Expand-O-Flash expansion joint covers are flexible, weather-proof exterior covers for expansion joint openings and are an effective, flexible closure for a wide variety of standard and special applications.

Bellows: Widths: 4" - 12" (10.16 cm - 30.48 cm) Standard
(Other sizes are available, contact JM for more information.)

Membrane Cover
JM PVC
Thicknesses: 0.060" (1.52 mm)
Width: 8" up to 75" (20.32 cm up to 1.91 m) *(Depending on flashing and welding to the membrane requirements.)*
Colors: White; Grey; Grey ES; Sandstone and Sandstone ES

Closed Cell Support Foam
Thickness varies from 0.375" to 0.75" (9.53 mm to 19.1 mm) depending on bellows width.

Nail Strip: Rigid PVC
Width: 1.375" (3.49 cm)

Factory fabricated transitions are available.

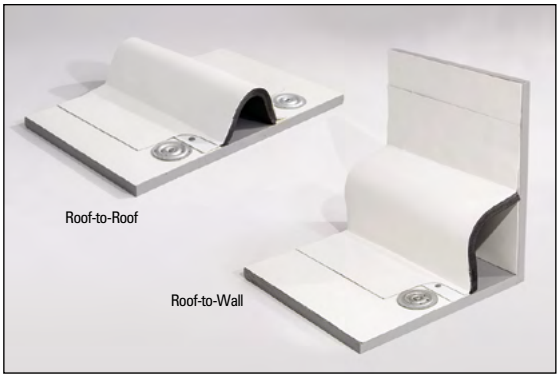

Component
S
Specialty
Single Ply

Type
EJ
Joint Cover

System Compatibility

This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP		SBS			
	HA	CA	CA	HW	HA	CA	HW	SA
	Do not use in Multi-Ply systems							

Single Ply	TPO		PVC		EPDM		
	MF	FA	MF	FA	MF	FA	BA
	Compatible with the selected Single Ply systems above						

Key: **HA** = Hot Applied **CA** = Cold Applied **HW** = Heat Weldable **SA** = Self Adhered **MF** = Mechanically Fastened **FA** = Fully Adhered **BA** = Ballasted

Energy and the Environment

Pre-Consumer Recycled Content	0%
Post-Consumer Recycled Content	0%

Peak Advantage® Guarantee Information

Covered under the JM Peak Advantage Guarantee when installed in a JM approved roofing system.

Installation/Application

- Do not install in direct contact with asphalt or coal tar pitch.
- Refer to JM applicator guides or detail drawings for instructions.

Packaging and Dimensions

Bellows Width*	4" - 12" (10.16 cm - 30.48 cm) Standard Larger bellows sizes available up to 54" (1.37 m)*
Cover Membrane Width	8" up to 75" (20.32 cm up to 1.91 m) Depending on flashing and welding to the membrane requirements
Roll Length	50 ft (15.24 m) *(max.)*
Producing Location	Lewiston, ME

*Other sizes are available, contact JM for more information.

Refer to the Safety Data Sheet and product label prior to using this product. The Safety Data Sheet is available by calling (800) 922-5922 or on the Web at www.jm.com/roofing.