


FRANSYL

POLYBASE R+ QUATRO SYSTEM

QUADRUPLE PROTECTION FOR ACCELERATED WATERPROOFING ROOF SYSTEM

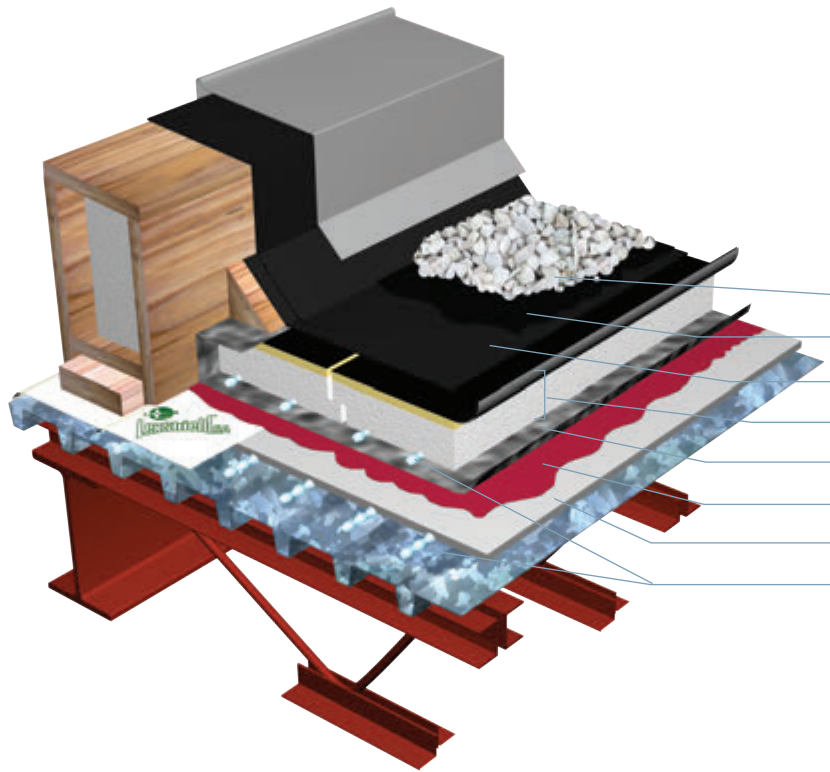

- White ballast
- FiberTite FTR 390 coating
- 180 S/F underlayment membrane
- Fransyl Polybase R+
- Lexcor Permaste stick vapour barrier
- Lexcor Multigrip adhesive and primer
- Gypsum support panel
- Lexcor Asphalt adhesive

ADVANTAGES

- Quadruple protection
- Materials and workmanship warranty available with this system*
- Insulation thermal value warranty of minimum 35 years
- Monolithic Polybase R+ panel
- R-Value of the panel as specified
- High thermal value
- No asphalt adhesive
- Odour free
- VOC free
- System sealed during application of Polybase R+ panel
- Fast and easy installation
- Increase construction site productivity
- Achieves Novoclimat insulation standards

ACKNOWLEDGMENT




*Some conditions apply

T. 450.477.4423

1.800.363.2307

FRANSYL.COM

POLYBASE R+ QUATRO SYSTEM

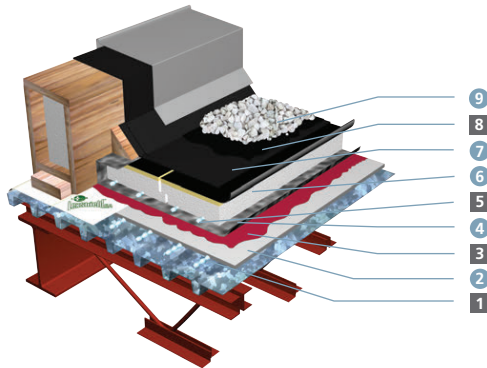

Date: _____

Project's name: _____

Address: _____

Deck: wood concrete steel other: _____

Building: Area(roof): _____ ft²
 Height / number of stage(s): _____

POLYBASE R+ QUATRO SYSTEM MATERIAL OPTION

Composition down to up	Attachment / Adhesion	Material
Support panel	1 <input type="checkbox"/> Lexcor Adphalt adhesive <input type="checkbox"/> Mechanical fasteners	2 <input type="checkbox"/> Gypsum _____ in <input type="checkbox"/> Cement board _____ in <input type="checkbox"/> Siliconed gypsum _____ in <input type="checkbox"/> Siliconed and primed gypsum _____ in
Vapour barrier	3 <input type="checkbox"/> Lexcor Multigrip Adhesive and primer <input type="checkbox"/> Lexcor Ultrastick Adhesive and primer <input type="checkbox"/> Lexcor Adphalt adhesive	4 <input type="checkbox"/> Lexcor Permte <input type="checkbox"/> Lexcor Permte Ultra-R <input type="checkbox"/> Lexcor Permte stick
Underlayment / Support panel / Flat insulation*	5 <input type="checkbox"/> Lexcor Adphalt adhesive <input type="checkbox"/> Mechanical fasteners	6 <input type="checkbox"/> Fransyl Polybase R+ _____ in
Underlayment membrane	Welded	7 <input type="checkbox"/> 180 S/F underlayment membrane
Cap sheet	8 <input type="checkbox"/> FiberTite FTR 390 coating	9 <input type="checkbox"/> White ballast

*For any additional slope or counterslope insulation, contact your Fransyl representative to obtain the appropriate option for your project.

Any system must be pre-approved by Fransyl Ltd. Any deviation from this system without Fransyl's authorization will automatically void the warranty in force for the system.

Note: Fransyl reserves the right to alter without notice the composition and conditions of use of systems and materials.

Note: Fransyl reserves the right to alter without notice the composition and conditions of use of systems and materials.

To obtain a quote for the composition of the system chosen above and the information below, send this document at infodevis@fransyl.com

Load weight by ft² R-Value Budget price by ft² Note(s)